




NOTES:-

- 1.) BIODISC TANK AND COVER ARE MANUFACTURED IN GLASS REINFORCED POLYESTER (G.R.P.). COVER IS FINISHED IN GREEN TO BS4800 TINT 12B:25.
- 2.) ELECTRICAL SUPPLY 240 VOLTS, 2 AMPS, 50 Hz SINGLE PHASE. CONTROL PANEL SUPPLIED (THREE PHASE VERSION AVAILABLE).
- 3.) BIODISC MUST BE LIFTED BY THE LIFTING POSITIONS PROVIDED.
- 4.) FOR INSTALLATION, MAINTENANCE AND DESLUDGE DETAILS REFER TO PROCEDURE DOCUMENTS SUPPLIED WITH UNIT.

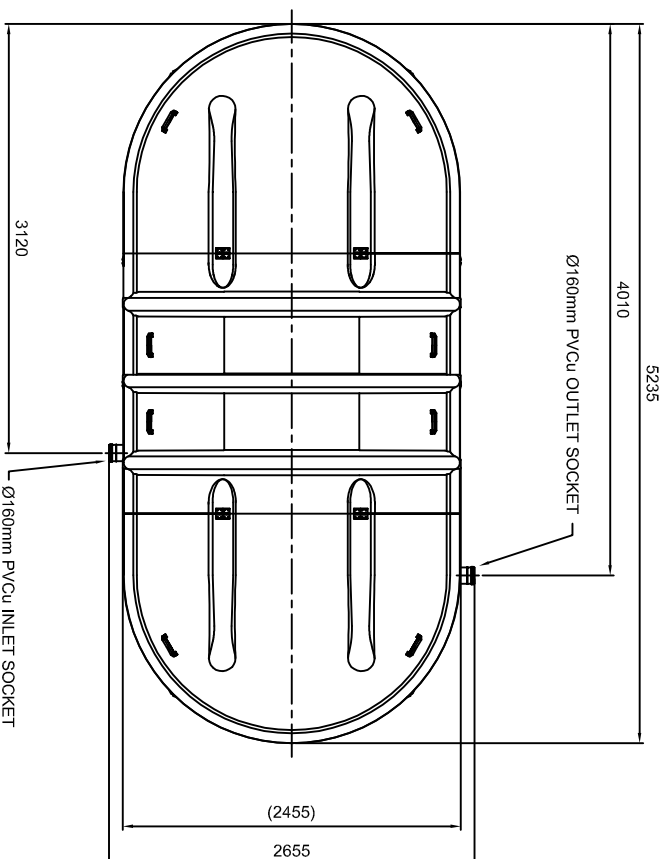

APPROX. DRY WEIGHT

1860 Kg

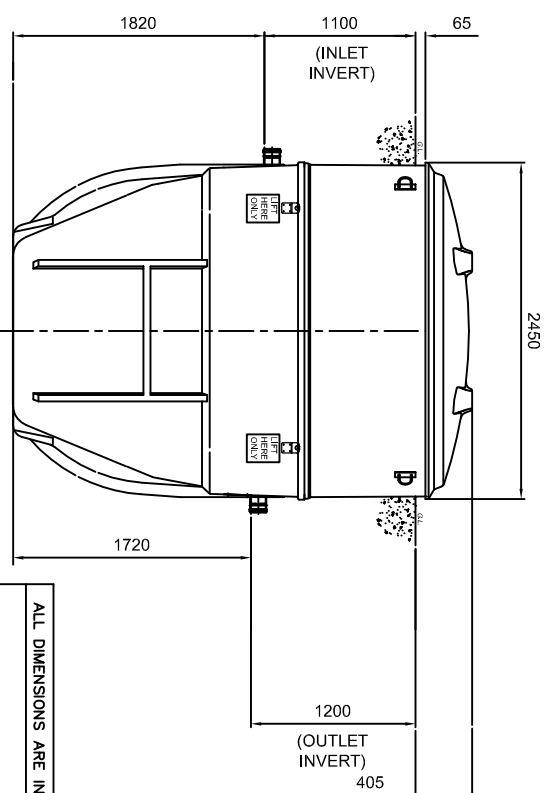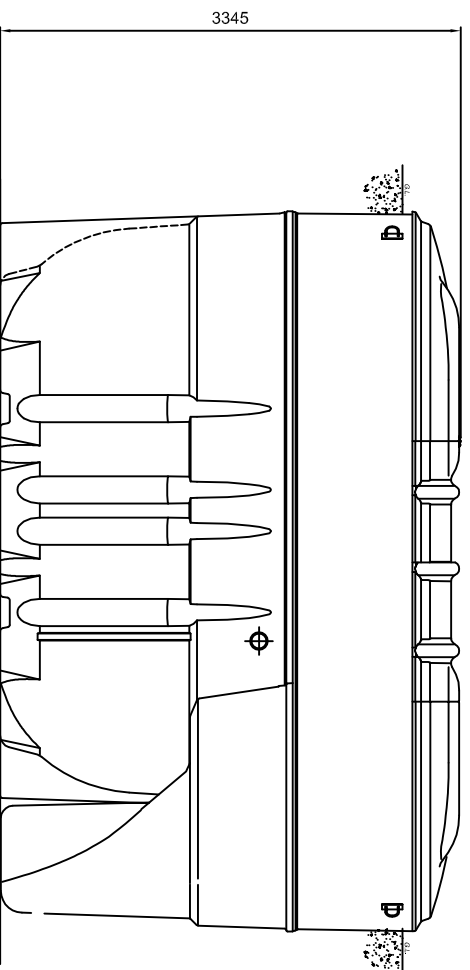

03	03/12/77	WMD	CC410 - LIFTING INSTRUCTIONS MODIFIED
02	02/08/73	LS	OVERALL DIMENSIONS ADDED
01	02/08/73	LS	INITIAL ISSUE
ISSUE	DATE	DRAWN	MODIFICATION

This drawing is copyright and may not be reproduced or used without the written permission of Chapman Kongsam Resins. THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE




THIRD WAVE PRODUCTION



TAKEN FROM 801041

ALL DIMENSIONS ARE IN MILLIMETRES – DO NOT SCALE

THE	
-----	--

BG BIODISC
WITH 110mm
INVERT



Environmental

SCALE	1:20	SHEET SIZE	A1
DRAWING No.		ISSUE	

DS1231P

3 ISSUE