




Notes:

- 1. This drawing is for 'Dimensional information Only', it is essential that this drawing is read in conjunction with the 'Installation Guidelines' supplied with the unit. (Copies available from our Sales Department)
- 2. Inlet and Outlet pipes are Ø160mm PVCu.
- 3. Extension neck kit is available for deep inverts up to a maximum invert of 2000mm. See extension neck drawing for assembly details.
- 4. Vent pipe connection is supplied but vent runs and stacks are supplied by others.
- 5. Air hose for tank internals is supplied with blower housing and is run through the vent.
- 6. All covers are Non-pedestrian duty
- 7. **Pea -shingle backfill is reliant on use of correct strapping and anchoring.
- 8. Socket, Upper pipe & Blanking cap supplied on request.

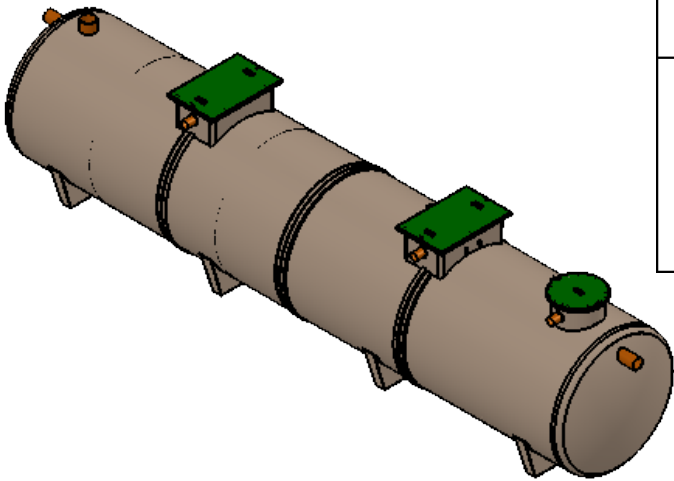

Unit Ref	'A' (mm)	'B' (mm)	'C' (mm)	Unit Weight (Kg)
BTX9	500	600	2250	890
	1000	1100	2750	930
	1500	1600	3250	970
	2000	2100	3750	1010

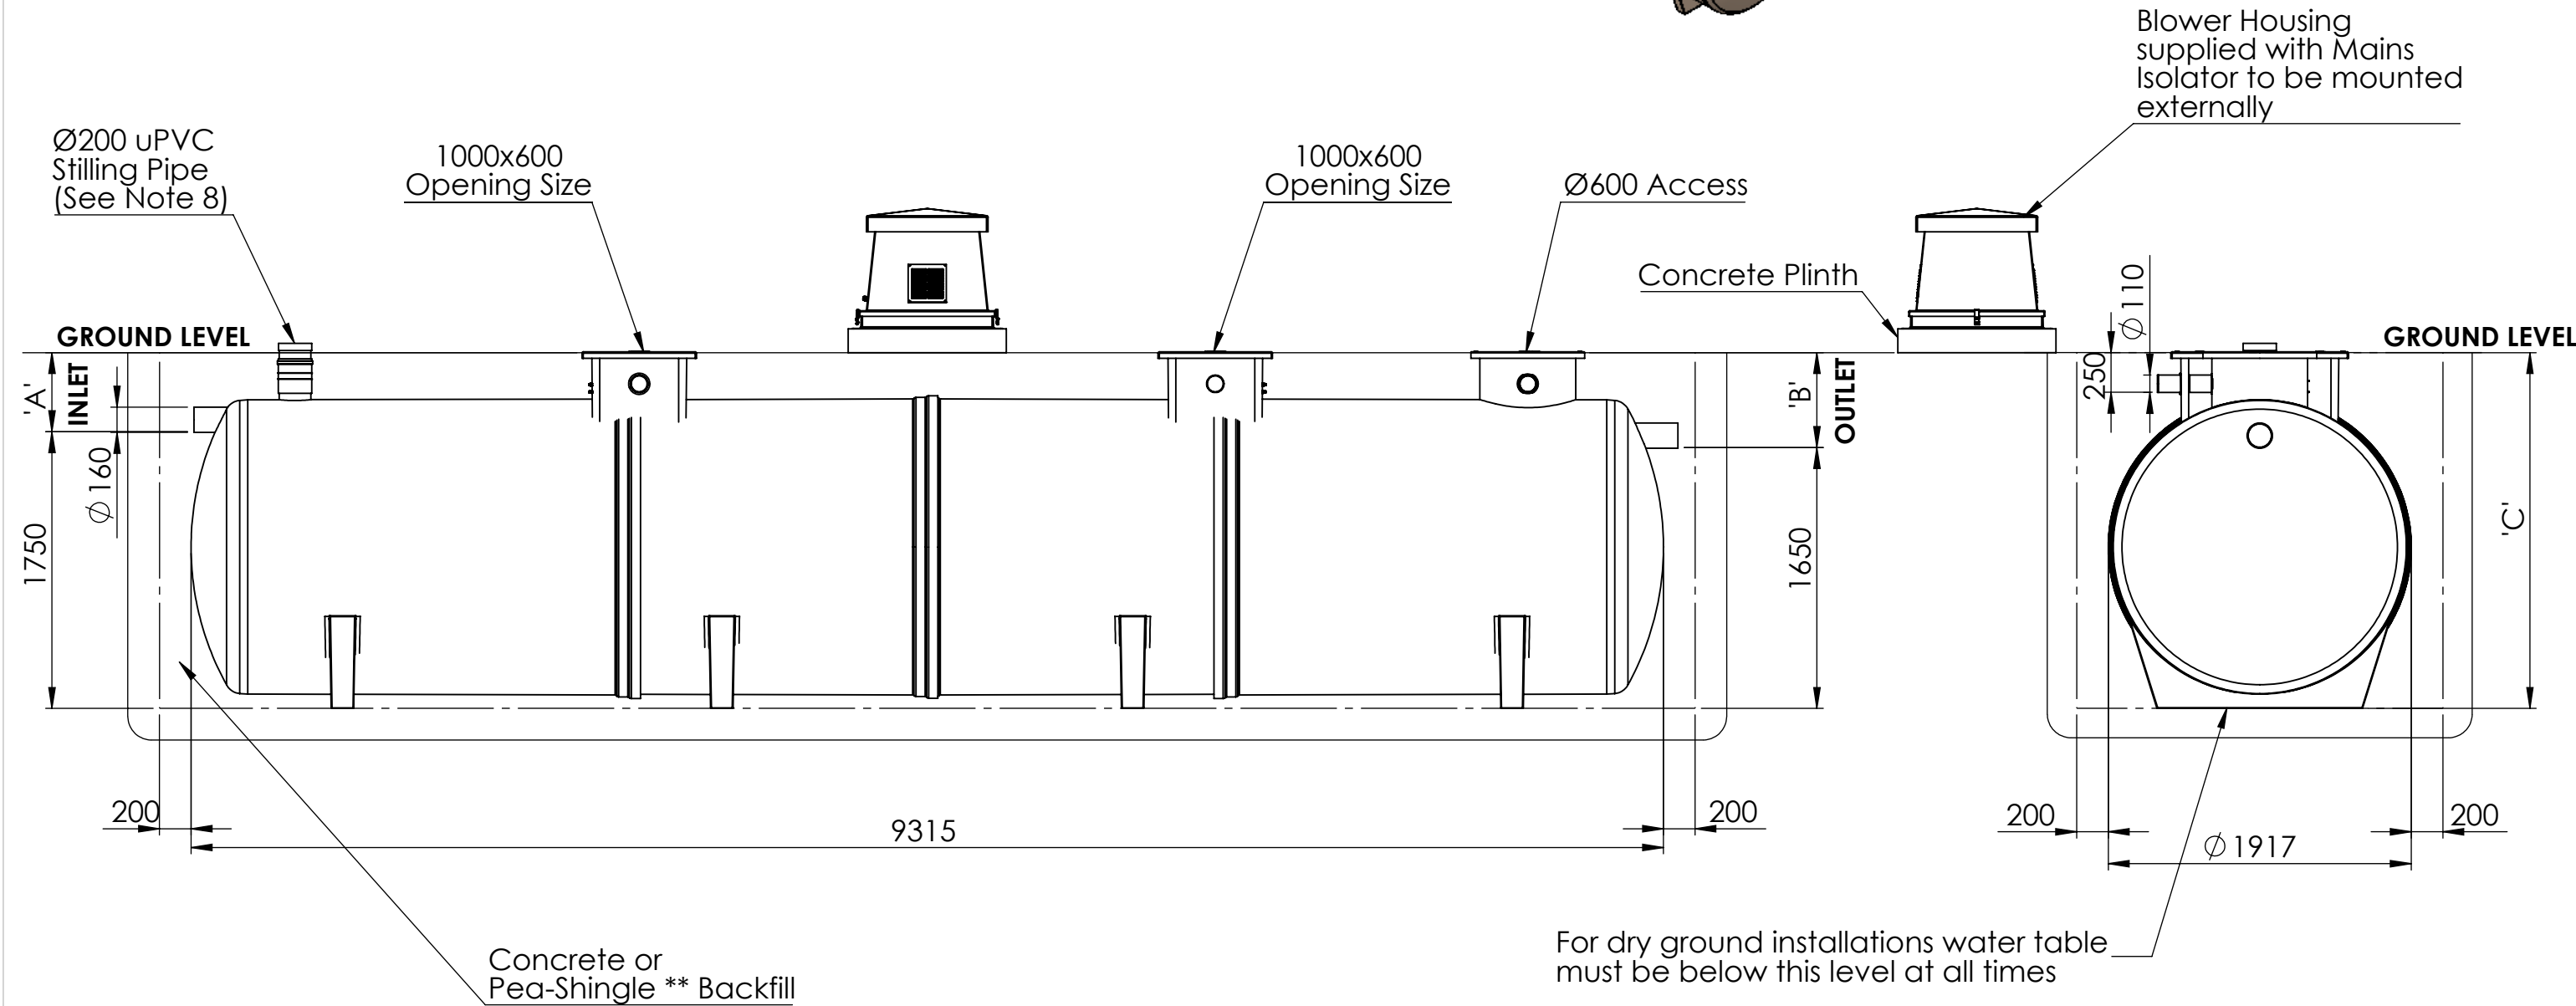

Please check with Kingspan Water & Energy for the latest Issue of the drawing				
Issue	Date	Drawn By	Approved By	Description
01	29/11/2024	TGY		Initial Issue
All Dimensions In mm		Scale: Do Not Scale		 Third Angle Projection
A:\Wastewater\Engineering\Engineering Projects\983A - BioTec+ (BioAir MKII)\Models\BioTec+9\DS1495P				

Modelled By :	Tolerance (unless stated) :
Weight : kg	Thickness :
Material :	Surface Area : m²
Kingspan Water & Energy reserve the right to alter the details of this drawing without prior notice. This drawing is copyright and may not be reproduced or used without the written permission of Kingspan Water & Energy	

Drawing : DS1495P	Page 1 of 1
BioTec+ 9 (50 PE) Gravity Sales Drawing	
	