



- Notes:
- 1. Standard inlet is PVCu underground drainage to BS4660 with seals.
 - 2. Tanks have an inlet depth of 1.0m. Upon request tanks may have an invert depth of 1.5m. Do not extend the tank neck.
 - 3. This drawing should be used for dimensional information only. Refer to installation guidelines.
 - 4. Inlet to cesspool should be suitably vented. Position to suit specific site conditions.
 - 5. Confirm local building regulations if additional venting is required.

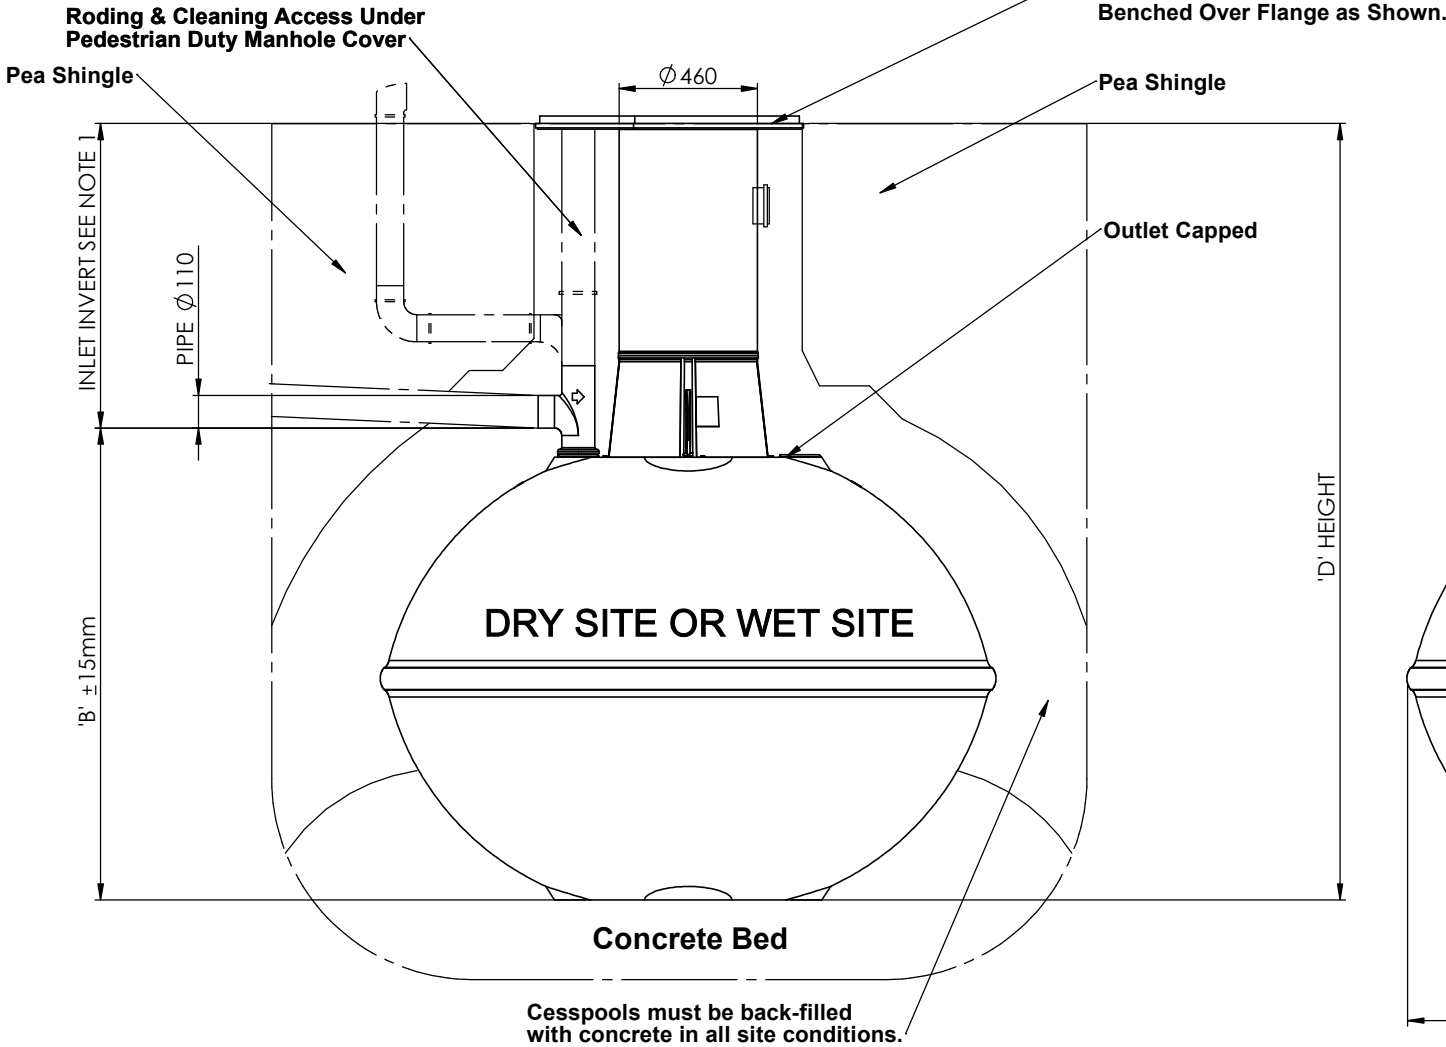

Capacity	Dimensions			
Litres	A' Ø	B'	D'	E'
2800	2075	1599	2599	1520
3800	2075	1819	2810	1740
4600	2084	1984	2984	1905

Note: Manholde Cover and Frame 600 x 600mm Pedestrian Duty.

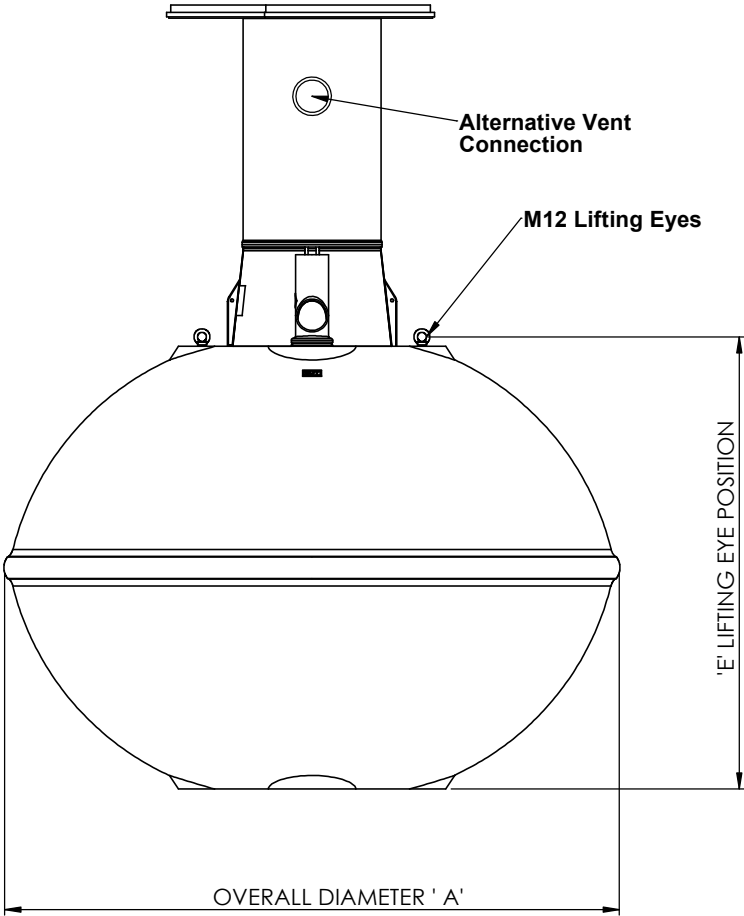


Please Check with Environmental Treatment Systems Limited For The Latest Issue Of This Drawing				
Issue	Date	Drawn by	Approved by	Description
04	29.03.18	WMD		CC1418
03	14.03.17	WMD		CC1372
02	25.04.12	CS		CC1014 - Rota-moulded Inlet & Outlet Pipes Introduced.

Material :	Tolerance (unless stated) :
Finish :	Thickness :
Weight :	Surface Area : m²
Modelled By :	

Drawing : DS0877P Page 1 of 1

2800, 3800 & 4600 LITRE ALPHA CESSPOOL TANKS

All Dimensions In mm	Scale: Do Not Scale	 Third Angle Projection
Y:\Drawing Data\02 - Sales Drawings\DS\DS - 08\DS0877P		

Kingspan Environmental reserve the right to alter the details of this drawing without prior notice. This drawing is copyright and may not be reproduced or used without the written permission of Kingspan Environmental

